


## Material Handling Equipment

### GPT-LM-024 -Lifting magnet

#### Features:

- Widely used in machining and mould processing industry.
- Using high performance permanent magnetic materials, with strong magnetic force, unique circuit design.
- High safety factor , maximum magnetic force is 3.5 times of rated lifting capacity.
- Handle switches with safety button, easy for single hand operation, more safety & convenience.
- Without electricity, magnetic force permanent, more safety in using and can be operated in the field.

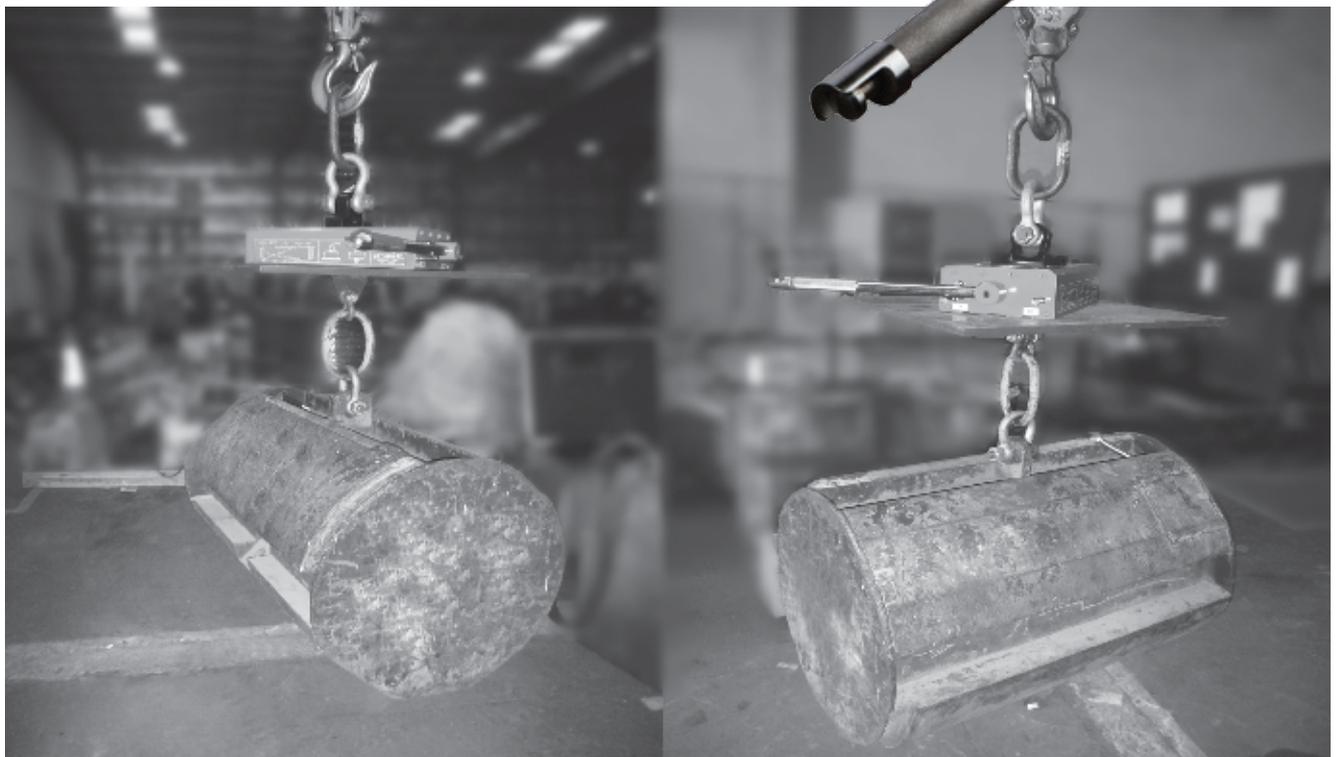

Lifting Magnet - 0.5 Ton - 3 Ton

v	GPT-PML-2/6	GPT-PML-2/10	GPT-PML-2/20	GPT-PML-2/30
Rated Lifting strength (KGF)	600	1000	2000	3000
Cylindrical Lifting strength (KGF)	200	300	600	1000
Max. Pull-off Strength (KGF)	1800	3000	6000	9000
L	234	302	441	430
W	162	190	231	270
H	74	87	107	134
R	267	306	500	620
Operation Temperature ( ° C)	< 80	< 80	< 80	< 80
Net Weight (kg)	21	37.5	77.0	120