


Grade 80 Chain

GPT-CH GR80-011 - Chain

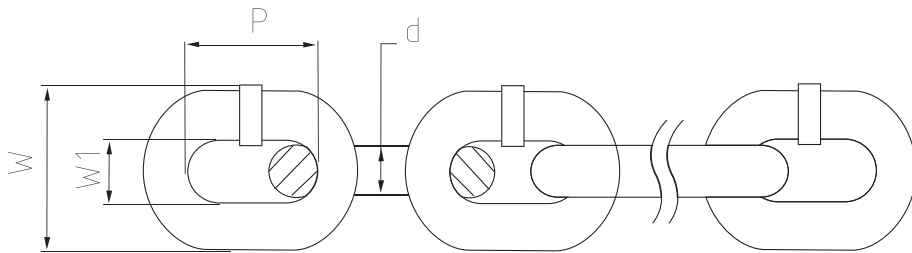

Description:

- Suitable for overhead lifting application
- For use with Grade 80 components
- High tensile steel
- Grade 80 & GPT embossed

Standard: EN 818 - 2

Material: Alloy steel

Factor of safety: 4 to 1

Construction: Quenched & tempered

Proof load: 2.5 times of working load limit

Finish: Black painted

Grade 80 Alloy Steel Chain

Chain dia (mm) d	WLL (KN)	Breaking load (KN)	Inside width (mm) W1	Outside width (mm) W	Pitch (mm) P	Weight (Kg/M)
7	15.00	61.60	9.10	25.90	21.00	1.10
8	20.00	80.40	10.40	29.60	24.00	1.40
10	31.50	126.00	13.00	37.00	30.00	2.20
13	53.00	212.00	16.90	48.10	39.00	3.80
16	80.00	322.00	20.80	59.20	48.00	5.70
18	100.00	407.00	23.40	66.60	54.00	7.30
20	125.00	503.00	26.00	74.00	60.00	9.00
22	150.00	608.00	28.60	81.40	66.00	10.90
26	212.00	849.00	33.80	96.20	78.00	14.80
32	321.00	1285.00	44.00	116.00	96.00	23.00