


Grade 80 - End Fittings


GPT-CGH -009 - Clevis grab hook

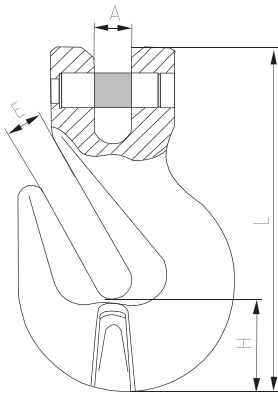

Description:

- For use with Grade 80 alloy steel chain
- Used for shortening or holding required length of chain
- Size, CE, WLL, Traceability code & GRIPTON or GPT embossed

GPT-SWH -010 - Swivel self locking

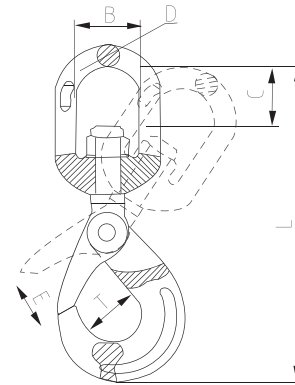

Standard:	EN 1677
Material:	Alloy steel
Factor of safety:	4 to 1
Construction:	Quenched & tempered
Proof load:	2 times of working load limit
Finish:	Powder coated

GPT-CGH -009 - Clevis grab hook

Clevis Grab Hook					
WLL/T	A (mm)	E (mm)	H (mm)	L (mm)	Weight (Kg)
1.12	8	8	16	75	0.25
2	9.5	11	18.5	90	0.32
3.15	12.5	13	30	126	0.73
5.3	15	16.5	42.5	163.5	1.6
8	19.5	19	45.5	183.5	2.8
12.5	24	24	56	219	5



GPT-SWH -010 - Swivel self locking

Swivel Self Locking Hook							
WLL/T	B (mm)	C (mm)	D (mm)	L (mm)	T (mm)	E (mm)	Weight (Kg)
2	35.5	26	12.5	210	46	34	1.10
3.15	42	34	15	247	56	44	2.00
5.3	50	38.5	16	302	69	52	4.00
8	61	55	21.5	383	86	60	7.30
12.5	72	61	26	418	100	83	11.60
15	95	95	33	527	98	88	16.00
21.2	122	115	42	610	110	95.5	21.5

